



**PulpTester**

Article No. S40180

# BAUER McNETT FIBRE CLASSIFIER

For the determination of fibre length of pulp by classification.

## MODELS

- Version with 3 Classifier chambers
- Version with 4 Classifier chambers
- Version with 5 Classifier chambers
- Version with 4 Classifier chambers and built-on Sommerville Shive Content Analyzer (Somerville see page 36)

Available Sieves:

ASTM 16 / 30 / 50 / 100 / 200, others on request



Model with 4 units

## MOST IMPORTANT BENEFITS

- ✓ Completely made of stainless steel
- ✓ Fully automated test procedure
- ✓ Quick clamping allows easy insertion and removal of the screens
- ✓ Built-in suction pump for emptying each container
- ✓ The attachment of a shive content analyser is possible (Somerville, Haindl, Brecht-Holl)

 **FRANK-PTI**  
QUALITY TESTING INSTRUMENTS

SUBSIDIARY OF  Fid Haindl

### Germany

FRANK-PTI GMBH  
Auf der Aue 1  
69488 Birkenau  
Tel.: +49 6201 84-0  
office@frank-pti.com

### Austria

PAPER TESTING INSTRUMENTS GMBH  
Hauptstrasse 41a (at BDZ)  
4663 Laakirchen  
Tel.: +43 7613 90607-0  
office@at.frank-pti.com

[www.frank-pti.com](http://www.frank-pti.com)

## PRODUCT DESCRIPTION

The fibre classifier is manufactured entirely from stainless steel. The classifier unit is equipped with quick fasteners for easy insertion and removal of the screens. Additionally, the individual units have an overflow into the next container. Each unit is fitted with a special agitator and an exchangeable screen. Control is fully automatic for ease of operation. An integrated timer allows setting individual classification times. The flow of water is regulated according to the standard being applied. The containers are drained via an integrated suction pump. The injection mechanism mounted on the housing allows to be quickly and easily rinsed after the classification process.

## TEST DESCRIPTION

The screens are fitted in descending order of perforation size into the fibre classifier. The paper filters are placed in the suction housings under the container, which is then closed. When the start button is pressed, water flows into the units. As soon as the last container is full, the start button is pressed again. The flow of water through the classifier stops and the sample is added to the uppermost container. After the filling time, the agitators and water flow starts automatically, and the classification process begins. After this period has elapsed the agitators come to a standstill and the addition of water stops. Opening the fasteners and starting the vacuum pump extracts the suspension. During rinsing the rest of the fibres collect in the filter. It can then be removed, dried and weighed.

## TECHNICAL DATA

### DEVICE/INSTRUMENT

- Fully automated test procedure
- Quick clamping allows easy insertion and removal of the screens
- Time switch for setting standardised running times
- Special agitator (580 UpM)
- Built-in suction pump for emptying each container
- Spraying device for quick rinse
- Included into delivery:  
Sieve storage container

### INSTALLATION REQUIREMENTS

Electrical connection	230 V / 50 Hz
Water connection	Yes
Compressed air	No

### APPLICABLE STANDARDS


- TAPPI T233



Classifier screens with different mesh sizes



Classifier container with quick clamping device

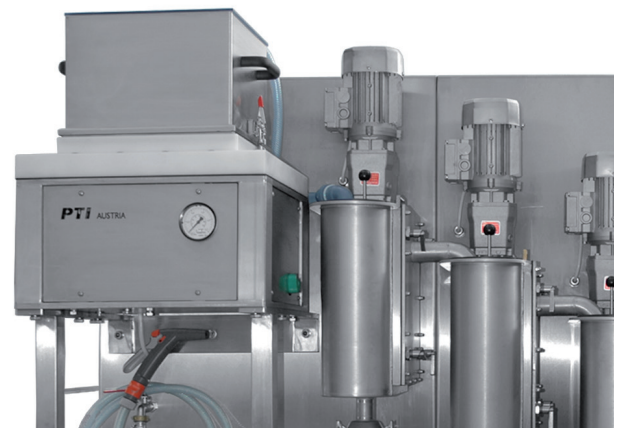

Bauer McNett Fibre classifier with built-on Somerville