

StandAlone

Article No. S13505



TWIN FOLDING TESTER

Determines the folding resistance of paper or board acc. to the Louis Schopper methode.


For:



✓ PAPER



✓ BOARD

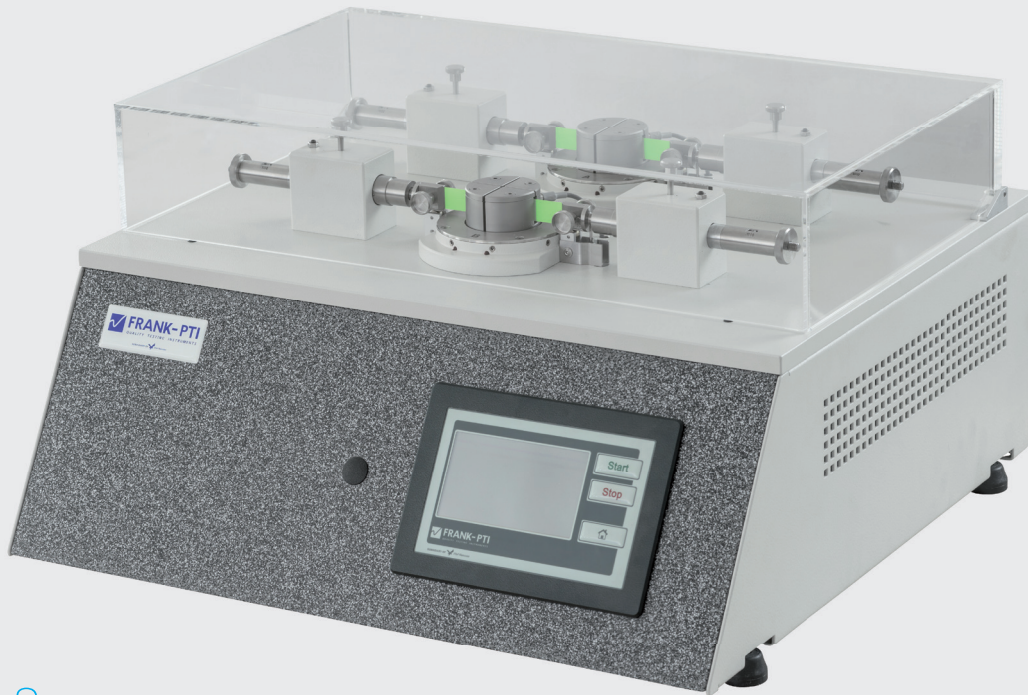

MODELS

MODEL FOR PAPER

- Up to 0.25 mm sample thickness
- Testing length: 90 mm, clamping length: 110 mm

MODEL FOR BOARD

- 0.25 – 1.4 mm sample thickness
- Testing length: 130 mm, clamping length: 150 mm



✓ ProbeNet-capable

MOST IMPORTANT BENEFITS

- ✓ Testing of two samples the same time due to the two folding heads
- ✓ Spring loaded sample carrier
- ✓ Speed: 120 strokes/min
- ✓ Automatic stop if device detects sample break

 **FRANK-PTI**
QUALITY TESTING INSTRUMENTS

SUBSIDIARY OF  Geflügel

Germany

FRANK-PTI GMBH
Auf der Aue 1
69488 Birkenau
Tel.: +49 6201 84-0
office@frank-pti.com

Austria

PAPER TESTING INSTRUMENTS GMBH
Hauptstrasse 41a (at BDZ)
4663 Laakirchen
Tel.: +43 7613 90607-0
office@at.frank-pti.com

www.frank-pti.com

PRODUCT DESCRIPTION

The twin folding tester consists of a robust case, on which two folding heads are attached. The sample supports, which are located to the side, are spring-loaded and are opened and closed using a quick latch. To prevent environmental influences an acrylic glass safety cover is attached above the folding tester. A digital display and start and stop buttons are located on the front of the unit.

TEST DESCRIPTION

Two samples, created with the sample strip cutter, are placed through the folding heads at the same time and clamped in the sample supports with a preset tensile force. Pushing the start button moves the sample swiftly between the folding rolls with a reciprocating action in a radius of 0.25mm. This folds the test strips in both directions. If one of the samples breaks, the folding operation continues on the second sample until this also breaks. Then the unit stops automatically and the number of folds before breaking is shown on the digital display. Because of the quite large standard deviation, two samples are always tested simultaneously. To ensure correct test behaviour the test should be carried out under suitable climatic conditions (23 °C / 50% RH).

TECHNICAL DATA

DEVICE/INSTRUMENT

- Testing of two samples the same time due to the two folding heads
- Safety shield made of acrylic glass
- Spring-loaded sample carriers
- Spring-load preset
- Speed: 120 strokes/min
- Temperatur sensor detects increase of the temperature
- Automatic stop if device detects sample break
- Digital display with statistic functions
- Compatible with ProbeNet (see pages 78 – 81)

INSTALLATION REQUIREMENTS


Electrical connection	110 – 230 V / 50 – 60 Hz
Water connection	No
Compressed air	No

APPLICABLE STANDARDS


- ISO 5626
- TAPPI T 423



Folding unit with open security cover

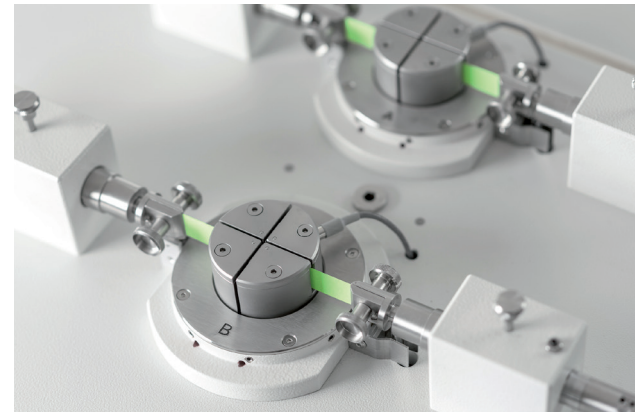

The samples are clamped with spring-loaded sample carriers

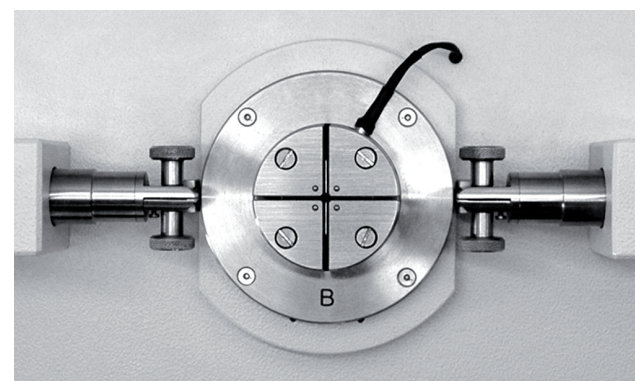

Folding head with integrated temperature sensor